

STUDIO

6036

SIZE

60" L x 36"W x 19"D

WATER CAPACITY

50 Gallons

WEIGHT

85-105 Pounds

INSTALLATION


Drop-in

BACK SLOPE

36°

MATERIAL

Acrylic

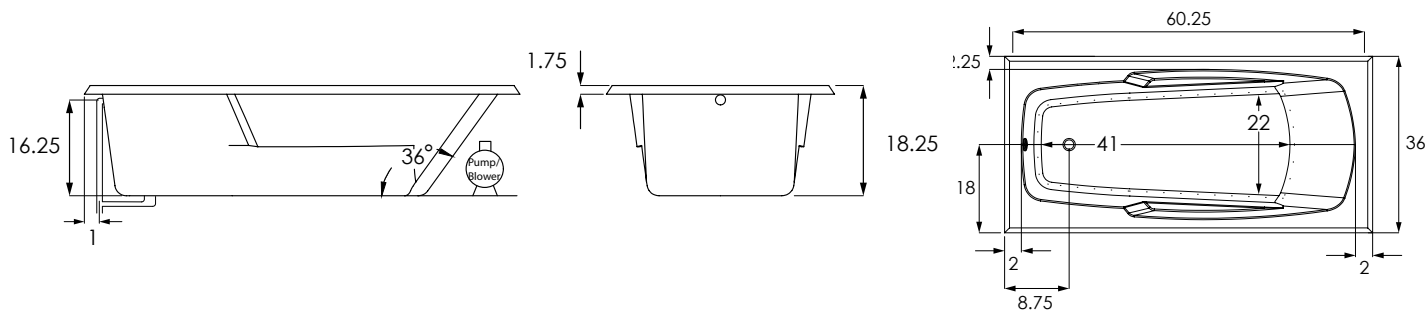**MODEL**

STU6036ATO	Tub Only
STU6036AWP	Whirlpool (6)
STU6036ATA	Thermal Air

COLORS

Standard	White Biscuit Bone
----------	------------------------

EXPORT CRATE

FRT.EXPCRT

HYDRO COAT

HYC.COA

HYDRO EXPRESS

69.104-HYD.EXP

HYDRO FILL

HYD.FIL

HYDROZONE SYSTEM

31.100

INLINE HEATER Whirlpool Systems only

No dedicated GFI required for 6 amp models

12.50 Amps 1.5 KW - 110V 27.100

6.00 Amps 0.75 KW 27.103

MODEL**JET PLATING FOR PVC WHIRLPOOL SYSTEMS**

Clear / Brass / Chrome. Trim kit covers jet escutcheons and suction

Polished Chrome

STU-PLA.BUI-PC

Polished Brass

STU-PLA.BUI-PB

MOLDED ARMRESTS

INCLUDED

PUMPS

Custom Pump Locations

69.116-CUS.PMP

SKIRT

BSK.XXA

TILE FLANGES

FLA.MO-X

UNDERMOUNT

UNDRMT

WASTE AND OVERFLOW

(Not Included)

Cable W/O

Polished Chrome

STU-WOB.PC

Polished Brass

STU-WOB.PB

INTEGRAL W/O (Std. round)

Polished Chrome

STU-IWO.PC

Polished Brass

STU-IWO.PB

H|S

HYDRO SYSTEMS

**Headquarters**29132 Avenue Paine
Valencia, CA 91355**Technical Support**support@hydrosystem.com**Orders Department**orders@hydrosystem.com**General Information**info@hydrosystem.com

Phone: 661-775-0686

Website: hydrosystem.com**CODES AND COMPLIANCES**

Massachusetts code File no: P1-0614-491



ADA Compliant

All specifications and options subject to change without notice
please contact a hydro systems representative for more information.

STUDIO

6036



STANDARD ACRYLIC COLORS



WHITE BISCUIT BONE

WELLNESS OPTIONS



Thermal Air

Tiny bubbles into the bathwater and offers untold relaxing benefits, similar to Swedish massage



Whirlpool Massaging Jets

Flexibility to customize jet location, quantity of jets and type of jet therapy



Ozone system

Ozone helps to disinfect the water and keep it clean

Drop-In Cutout Install Dimensions:


- (L)ength - 58"
- (w)idth - 34"
- Finished Height - 17½"

3-Wall Install Dimensions:

- (L)ength - 60"
- (w)idth - 36"
- Top of Ledger - 19"

OTHER OPTIONS

Additional options can be found on our website



Integral Waste and Overflow

Seamless built-in protection for bathtub



Integral Tile Flange

Available on select non-oval tubs. Please specify which sides flange will need to be added to.



Skirt

Add as many skirts to most rectangular drop-in tubs to fit any application. Seamed or seamless, peninsula, corner, freestanding



Hydro Fill

Fully integrated high-flow spout that offers a sleek, modern alternative to traditional tub fillers

ELECTRICAL REQUIREMENTS

All electrical information can be found on our website

INSTALLATION VIDEOS

All installation videos can be found on our website

Installation Tips:

- Adding multiple systems/options may require equipment to stick out from tub deck or be installed remotely



Headquarters
29132 Avenue Paine
Valencia, CA 91355

Manufacturing Facility
385 Highway 155 South
McDonough, GA 30253

Technical Support
support@hydrosystem.com

Orders Department
orders@hydrosystem.com

General Information
info@hydrosystem.com
Phone: 661-775-0686
Website: hydrosystem.com

CODES AND COMPLIANCES

Massachusetts code File no: P1-0614-491



All specifications and options subject to change without notice please contact a hydro systems representative for more information.