

HS 4236 Shower

Hydro Systems, Inc.
 29132 Avenue Paine, Valencia CA
 Phone: (661)775-0686 - Fax: (661)775-0668
 www.hydrossystem.com • email:sales@hydrossystem.com



Features:

- Overall Dimensions installed:
42" W x 36" D x 77" H
- Fire retardant Gel-coat finish
- Wall meet Class I and Class A ratings per
ASTM E-84 Flame spread and smoke density
requirements for both inside and outside surfaces
- Two built-in soap shelves
- Galvanized steel reinforcing stiffeners
- Extra reinforcing in all critical areas
- Slip resistant floor
- 18" Satin finish stainless steel grab bar horizontally
mounted
- 24" Satin finish stainless steel grab bar vertically
mounted
- 36" Satin finish stainless steel curtain rod installed
- Drain is brass body, self-caulking with stainless
steel strainer
- Unit is packaged with cardboard on forklift pallet
- Full LTL wooden shipping crate available as option
- 24" Grab Bar


All specifications subject to change without notice.

Suggested Mechanical Specifications:

Hydro Systems HS 4236 (4" dam) shower with 5 year limited warranty, 42" Wide x 36" Deep x 77" High with 1" O.D. satin finish stainless steel curtain rod, 24" satin finish stainless steel grab bar on wet wall, 18" satin finish stainless steel grab bar on rear wall, two built-in soap shelves in rear corners, center drain with center sloping integrally molded slip-resistant floor. Units shall be molded of gel-coated fiberglass reinforced polyester resin. Units shall meet or exceed physical and performance requirement for Type 2 gel-coated fixtures (of ANSI Z124.2 showers). Standing/walking surfaces shall meet slip-resistance requirements of Consumer Safety Specification ASTM F-462, with static friction coefficient no less than 0.04. Handicapped grab bars shall be nom. 1½" O.D. and support a minimum load of 250 lbs. in accordance with the Consumer Safety Specification ASTM F-446 and ANSI A117.1 guidelines. Units shall have a flame spread rating of 25 or less (ASTM E-84, E-162); smoke density rating of 450 or less per (ASTM E-84); equal to Class A, NFPA, and Class 1, United Building Code. Units shall bear or have affixed to them a molded manufacturer's identification logo/or permanent label showing manufacturer's name and model number and the seal of the Uniform Plumbing Code and shall be accompanied by detailed installation recommendations. Also affixed and for removal by the owner /occupant/user only, unit shall be equipped with user maintenance instructions and the full text of the limited warranty. As manufactured by Hydro Systems, Inc. - Valencia, California.

Warranty


Hydro Systems, Inc. products are backed by our exclusive 5 year limited warranty. (see warranty for complete details)

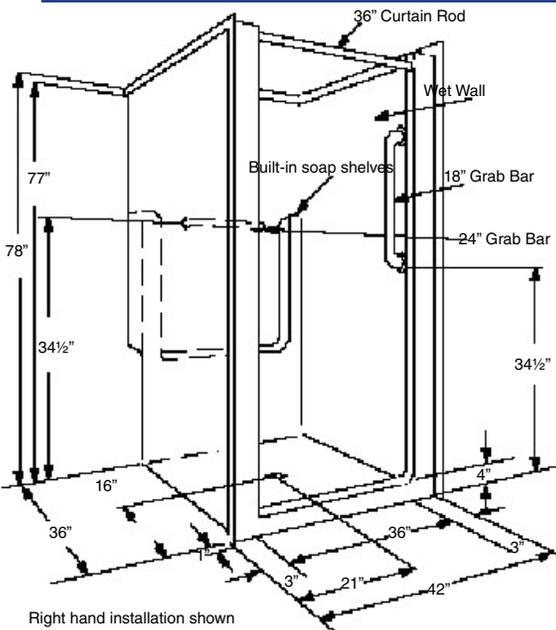

Approvals

- IAPMO/UPC - Uniform Plumbing Code - File 3307
- ASTM E-84 - Flame Spread and Smoke Density
- ANSI A117.1 - Accessibility and Grab Bar Guidelines
- ANSI Z124.2 - Standard for Plastic Shower Units

- ASTM F-446 - Grab Bars and Accessories Installed in the Bathing Area
- ASTM F-462 - Specification for Slip-Resistant Bathing Facilities

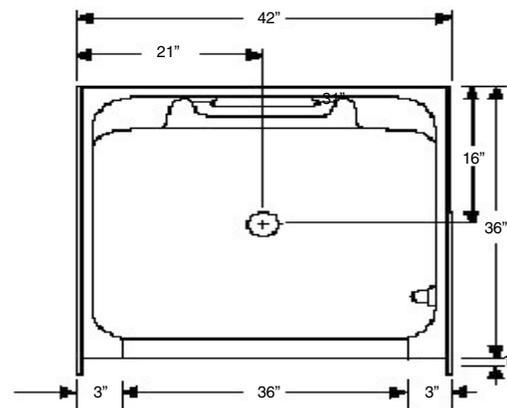

Galvanized steel reinforced and/or wood reinforcement will vary due to application of accessories

