SHANNON 6032

STUDIO COLLECTION

H|S

PVC Systems Include:

- 6 Fully directional adjustable PVC jets
- Anti-vortex safety suction
- Color matched system trim
- Rigid PVC piping
- Self draining pump and system
- Air switch control
- 1.25 HP single speed pump
- Requires 120 V 15 Amp Dedicated GFCI

Options: (more information available on our website)

- Custom jet and pump locations
- Integral waste and overflow (round)
- In-line heater
- Hydro Coat
- Hydro Express quick ship
- Cable Waste and Overflow
- Hydrozone

Standard Electrical Requirements:

- Whirlpool System | One 20 Amp Dedicated Circuit
- Thermal Air System | One 15 Amp Dedicated Circuit
- Inline Heater (600 or 1500 Watts) | One 15 Amp Dedicated Circuit

All electrical components come standard at 115 volts

All electrical circuits must be GFCI protected

HYDRO SYSTEMS
Family Owned And Operated Since 1978

29132 Avenue Paine. Valencia, CA, 91355
661.775.0686 | hydrosystem.com

* Indicates options that are shown (listed in order from top to bottom/left to right)

Page 1 of 2   MADE IN AMERICA

SHANNON 6032

STUDIO COLLECTION

AS SHOWN:

Whirlpool option with standard jet location

FEATURES SHOWN:

- Jets
- Overflow location
- Flange on Skirt

ALSO AVAILABLE:

- Soaking tub only
- Thermal Air

WATER CAPACITY:

63 Gallons

BACK SLOPE:

28 Degrees

WEIGHT:

90 - 110 Pounds

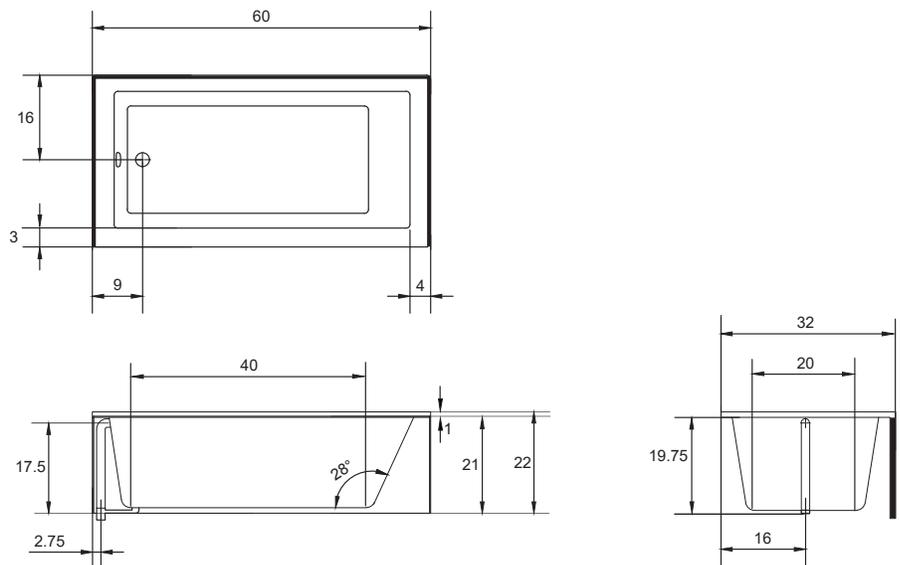**3-WALL INSTALLATION DIMENSIONS:**

Opening (L)ength - 60"
Opening (W)idth - 32"
Ledger- 19-3/4"

ACRYLIC TUB

- Model comes with integral tile flange and skirt
- Extra thick reinforced fiberglass
- Pre-wired pump on pump platform (standard pump location only)
- Integral E-Z level platform facilitates installation
- Tub must be set in a mortar base

CODES AND COMPLIANCES

Massachusetts code File no: P1-0614-491

MADE IN AMERICA