


## **The 4-Button C1 System:**

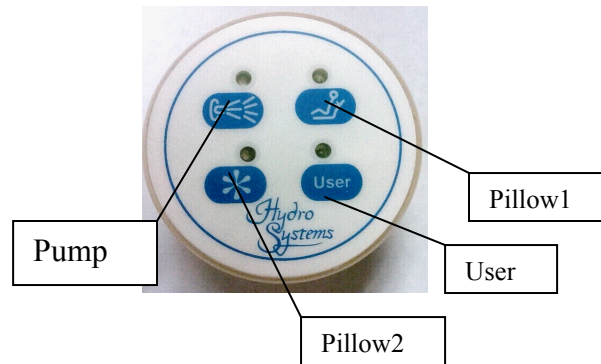

## **Control Features:**

- Pump ON/OFF with water sensor control
- 2 Pairs of Pillow control; full on, plus three control speeds
- User preference button
- Automatic 30-minute run-timer pump

### **Single Speed Pump Motor Operation:**

Once the system water sensor has detected water, the pump is available for activation. Detection of water is indicated when button number 1 LED is illuminated. Press the pump button to turn the pump ON and press the button again to turn the pump OFF.

### **Single Button Pillow Operations:**

The pillow function can only be turned on when the system pump is active. The first press of the pillow button turns the pillows full ON; the second, third and fourth button presses cycle the pillows through 3 operating speeds. The fifth press will turn the pillow function OFF. If the pump is turned off while the pillows are functioning, then the pillow operation will shut down automatically.

### **User Preference Button:**

The pump must be operational in order to store a user-preferred setting. Once a preferred operation is obtained, press the user button to store the settings profile to memory. To retrieve the stored setting from memory, press and release the user button when water is detected and the pump is not operating; the system will recall the functional settings that were stored. If the user attempts to recall when a preference has not yet been stored, the display will indicate an error by flashing the four LEDs when button four is pressed. The user must store a preference in order to recall a preference. User preferences are re-programmable.

### **The Automatic 30-Minute Run-Timer:**

Once the system motor has been activated, an automatic timer is set to 30-minutes. The system will stay in operation until the run-timer expires, at which time all functions will shut down. The light device timer runs independent of the main system run-timer.

