


The 4-Button C12 System:

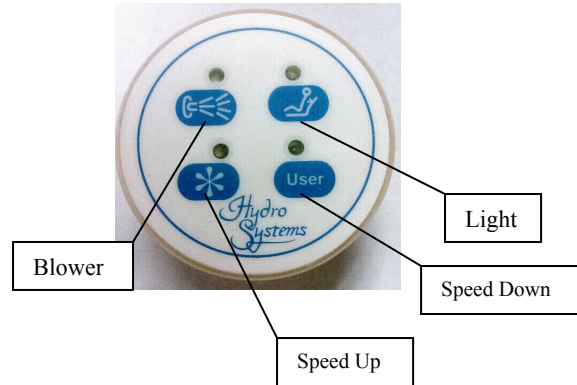

Control Features:

- Variable Speed Blower using speed up/down buttons with Wave and Pulse modes
- Light device ON/OFF control with built in 30-minute light timer
- Automatic 30-minute run-timer for blower
- Purge Clean Cycle

The Purge Clean Cycle:

A system fitted with a blower automatically contains the purge clean cycle feature. 15 minutes after the blower is turned off and no water is in the tub, the blower will activate for 2 minutes to remove any standing water and to ensure that the pipes are adequately cleared of moisture.

Light Operation:

Pressing and releasing the light button activates the light; a second press deactivates the light. Once the light has been activated, an internal light timer is set to 30-minutes. If the light is left on for 30-minutes it will automatically be shut down unless the system is operational, in which case the light will remain on until the system run-timer expires.

Blower Motor Control using the +/- keys:

Once the blower has been turned on, a press and hold of button 1 will illuminate the lower 2 LEDs of the display indicating that the speed Up/Down buttons are available for blower speed adjustment. The buttons will stay illuminated for 10 seconds of no button pressing. A press and release of button 1 will shut the blower down. To enter the 'Wave' and 'Pulse' feature modes, press and hold the speed down button (once speed control is gained). The button LED blinks to indicate the Wave mode, and blinks a second time to indicate the 'Pulse' mode, release the button on the desired blower mode setting for activation of the motor feature.

The Automatic 30-Minute Run-Timer:

Once the system motor has been activated, an automatic timer is set to 30-minutes. The system will stay in operation until the run-timer expires, at which time all functions will shut down. The light device timer runs independent of the main system run-timer.

