

Solitude

Simplicity is expressed in every graceful line of the Solitude. The extra deep styling allows for extra soaking relaxation, while the compact size allows for installation in a narrow space.



60"L x 30"W x 20"D 50 Gallons



Acrylic Tub – construction features

Acrylic models finished in 1/8" thick layer of deep lustrous acrylic.

Extra thick reinforced fiberglass.

Pre-wired pump on pump platform (standard pump location only)

Integral E-Z Level platform facilitates installation.

Non-skid bottom.

PVC Systems – include:

6 Fully directional adjustable PVC jets **Anti-vortex** safety suction.

Color matched system trim

HydrOzone ozone sanitation system

Rigid PVC piping

Self draining pump and system

Soft Touch electronic on/off control with 30-min. integral timer

2.25 HP Single Speed Pump

Cable waste & overflow

Hydro Systems - Options:

Available as Tub only, Thermal Air, Whirlpool or Combo

Microban Antibacterial Protection

Extra High Density Fiberglass

Armrest

Flange molded

Skirt

Custom jet and pump locations

Plated Metallic finish

Additional directional Jets

Swirling, Rotating, or Jumbo Jets

Micro Therapy Jet

Integral Waste & Overflow

1.5 HP Variable Speed Pump (digital temperature display optional)

Electronic low water protection

In-line Heater

Chromatherapy-LED Lighting System

Chromatherapy-LED Mini Spotlights

Mood Light

Grab Bars

Back Masseuse

Neck Masseuse Pillow

Hydro Fragrance

Hydro Fusion

Hvdro Coat

Hydro Express quick ship

Approvals & Listings

Commonwealth of Massachusetts UPC & USPC - US & Canada














Solitude



Must be set in Mortar Base

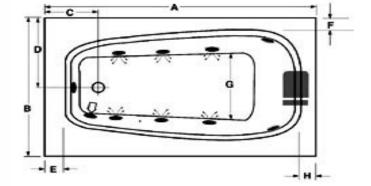



Jets

Anti-vortex suction


Overflow location

AS SHOWN:


Whirlpool option w/ standard jets


ALSO AVAILABLE:

Soaking Tub Only, Whirlpool, Thermal Air, Combo



Model	GC	AC	Α	В	С	D	E	F	G	Н	- 1	J	K	L	M	Jet	Pump	Wat.Cap.
6030	N/A		59¾"	29¾"	9½"	15"	2¾"	1¾"	16½"	1¾"	38"	20"	17½"	1¾"	1½"	6	2.25	50 gal.
Amps	Volts	Breaker		Dedicated Service														
13.5	120	20 a	amp	GFCI Protected														





	ls	land Drop-In		3 Wall Installation						
Model	(L)ength	(W)idth	(H)eigth Finish	(L)ength	(W)idth	H)eigth Ledger				
6030	57¾"	27¾"	19¼"	59¾"	29¾"	20¾"				

Disclaimer: Certain options or altering the pump/blower location may cause the pump/blower to extend beyond the tub decking. For cutout dimensions wait for unit to arrive. All specifications subject to change without notice.